

## Features

- Low reverse leakage
- High forward surge capability
- High reliability
- High temperature soldering guaranteed: 260°C/10seconds, 9.5mm lead length
- Lead and body according with RoHS standard


## Mechanical Data

**Case:** DO-15 Molded plastic

**Terminals:** Plated axial leads, solderable per  
MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

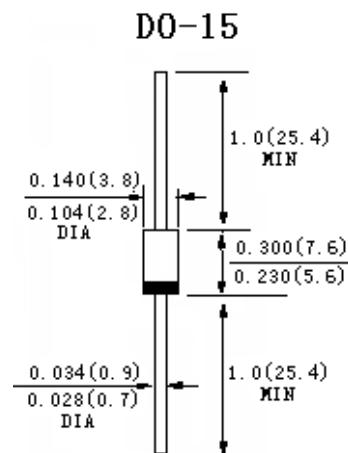

Dimensions in inches and (millimeters)

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60 Hz, resistive or inductive load

For capacitive load, derate current by 20%

TYPE NUMBER	Symbols	HER 201	HER 202	HER 203	HER 204	HER 205	HER 206	HER 207	HER 208	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	300	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	210	280	420	560	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	300	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length at T <sub>A</sub> =55°C	I <sub>F(AV)</sub>	2.0							A	
Peak Forward Surge Current, 8.3ms single half-wave superimposed on rated load(JEDEC method)	I <sub>FSM</sub>	60							A	
Maximum instantaneous forward voltage at 2.0A	V <sub>F</sub>	1.0			1.3			1.7		
Maximum reverse recovery time ( Note1)	T <sub>rr</sub>	50				70				nS
Maximum DC reverse current at rated DC blocking voltage	I <sub>R1</sub>	5							μA	
Ta=100°C	I <sub>R2</sub>	100							μA	
Operating junction temperature range	T <sub>J</sub>	-55 to +150							°C	
Storage temperature range	T <sub>stg</sub>	-55 to +150							°C	

**Note:** 1. Reverse Recovery Test Conditions: IF=0.5A, IR=1.0A, IRR=0.25A.

### Characteristic Curves

