

Features


- Low reverse leakage
- High forward surge capability
- High reliability
- High temperature soldering guaranteed:260°C/10seconds, 9.5mm lead length
- Lead and body according with RoHS standard

Mechanical Data

Case: DO-41 Molded plastic

Epoxy: UL 94V-0 rate flame retardant

Lead: Pure tin plated, lead free

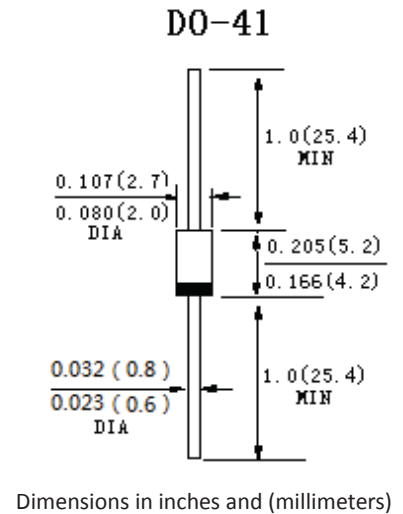

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60 Hz, resistive or inductive load

For capacitive load, derate current by 20%

TYPE NUMBER	Symbols	BA157	BA158	BA159	Units
Maximum repetitive peak reverse voltage	V_{RRM}	400	600	1000	V
Maximum RMS voltage	V_{RMS}	280	420	700	V
Maximum DC blocking voltage	V_{DC}	400	600	1000	V
Maximum average forward rectified current 9.5mm lead length at $T_A=55^\circ C$	$I_{F(AV)}$	1.0			A
Peak Forward Surge Current,8.3ms single half-wave superimposed on rated load(JEDEC method)	I_{FSM}	30			A
Maximum instantaneous forward voltage at1.0A	V_F	1.3			V
Maximum reverse recovery time(Note: 1)	T_{rr}	150	250	500	nS
Maximum DC reverse current at rated DC blocking voltage	$T_a=25^\circ C$	I_{R1}	5.0		μA
	$T_a=100^\circ C$	I_{R2}	50.0		μA
Operating junction temperature range	T_J	-55to+150			$^\circ C$
Storage temperature range	T_{stg}	-55to+150			$^\circ C$

Note: 1. Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $IRR=0.25A$.

Characteristic Curves

Fig. 1 - Forward Current Derating Curve

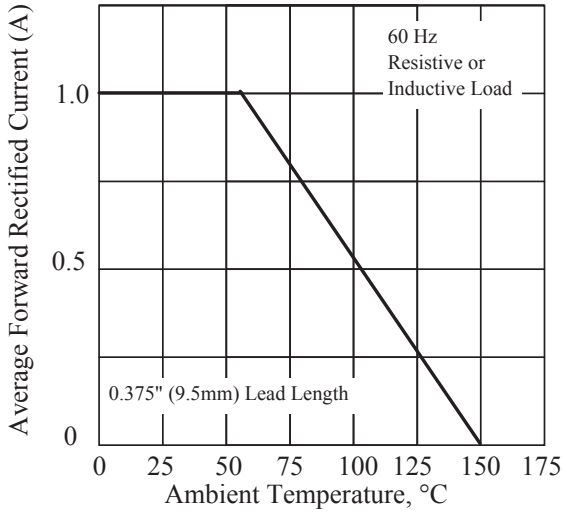


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

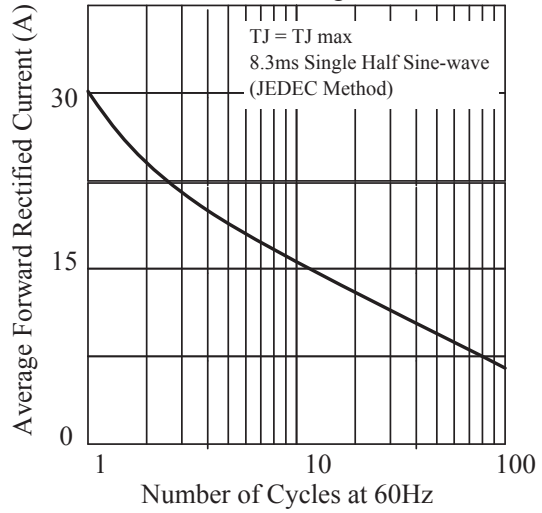


Fig. 3 - Typical Instantaneous Forward Characteristics

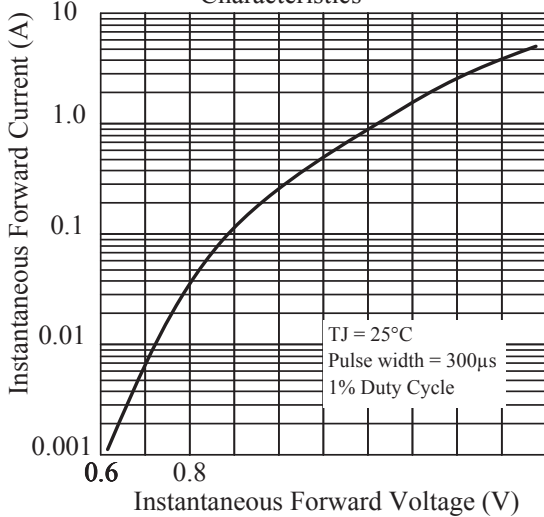


Fig. 4 - Typical Reverse Characteristics

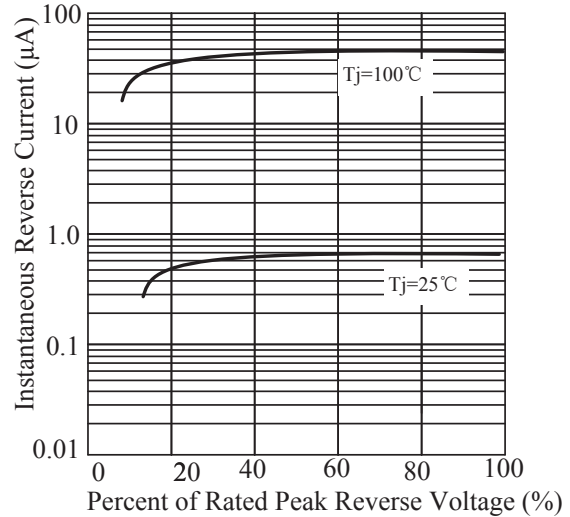


Fig. 5 - Typical Junction Capacitance

