

Features


- Low Zener Impedance
- Low Reverse Leakage
- Power Dissipation of 1000mW
- High Stability and High Reliability

Mechanical Data

Cases : DO-41 Molded plastic

Polarity: Color band denotes cathode end

Mounting Position: Any

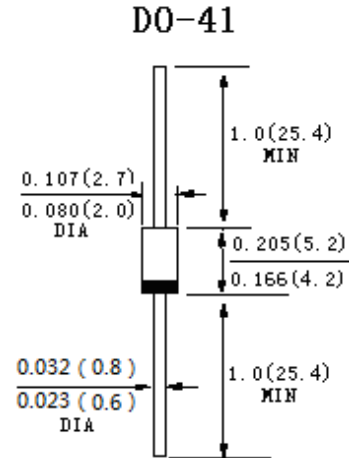

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified.)

Parameters	Symbol	Value	Unit
Power Dissipation	P_d	1000 1)	mW
Forward Voltage @IF=200mA	VF	1.5	V
Storage temperature range	T_s	-55-+200	°C

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

TYPE (NOTE 1)	齐纳电压	测量电流	最大齐纳阻抗			最大反向漏电流		最大直流齐纳电流
	V Z@IZT	IZT	Z ZT @IZT (注释 3)	Z ZK @IZK (注释 3)	I ZK	IR@VR	VR	I ZM @50°C (注释 4)
	V	mA	Ω	Ω	mA	μA	V	mA
1N4734	5.6	45	5	600	1.0	10	2	162
1N4735	6.2	41	2	700	1.0	10	3	146
1N4736	6.8	37	3.5	700	1.0	10	4	133
1N4737	7.5	31	4.0	700	0.5	10	5	121
1N4738	8.2	31	4.5	700	0.5	10	6	110
1N4739	9.1	28	5.0	700	0.25	10	7	100
1N4740	10	25	7	700	0.25	10	7.6	91
1N4741	11	23	8	700	0.25	5	8.4	83
1N4742	12	21	9	700	0.25	5	9.1	76
1N4743	13	19	10	700	0.25	5	9.9	69
1N4744	15	17	14	700	0.25	5	11.4	61
1N4745	16	15.5	16	700	0.25	5	12.2	57
1N4746	18	14	20	750	0.25	5	13.7	50
1N4747	20	12.5	22	750	0.25	5	15.2	45
1N4748	22	11.5	23	750	0.25	5	16.7	41

型号 (注释 1)	齐纳电压	测量电流	最大齐纳阻抗			最大反向漏电流		最大直流齐纳电流
	V Z@IZT	IZT	Z ZT @IZT (注释 3)	Z ZK @IZK (注释 3)	I ZK	IR@VR	VR	I ZM @50°C (注释 4)
	V	mA	Ω	Ω	mA		V	mA
1N4749	24	10.5	25	750	0.25	5	18.2	38
1N4750	27	9.5	35	750	0.25	5	20.6	34
1N4751	30	8.5	40	1000	0.25	5	22.8	30
1N4752	33	7.5	45	1000	0.25	5	25.1	27
1N4753	36	7.0	50	1000	0.25	5	27.4	25
1N4754	39	6.5	60	1000	0.25	5	29.7	23
1N4755	43	6.0	70	1500	0.25	5	32.7	22
1N4756	47	5.5	80	1500	0.25	5	35.8	19
1N4757	51	5.0	95	1500	0.25	5	38.8	18
1N4758	56	4.5	110	2000	0.25	5	42.6	16
1N4759	62	4.0	125	2000	0.25	5	47.1	14
1N4760	68	3.7	150	2000	0.25	5	51.7	13
1N4761	75	3.3	175	2000	0.25	5	56.0	12
1N4762	82	3.0	200	3000	0.25	5	62.2	11
1N4763	91	2.8	250	3000	0.25	5	69.2	10
1N4764	100	2.5	350	3000	0.25	5	76.0	9
1N4765	110	2.3	450	4000	0.25	5	83.6	7.2
1N4766	120	2.0	550	4500	0.25	5	91.2	7.0
1N4767	130	1.9	700	5000	0.25	5	98.8	6.0
1N4768	150	1.7	1000	6000	0.25	5	114.0	5.5
1N4769	160	1.6	1100	6500	0.25	5	121.6	5.2
1N4770	180	1.4	1200	7000	0.25	5	136.8	4.6
1N4771	200	1.2	1500	8000	0.25	5	152.0	4.0

注释：1. 标准型的齐纳电压值偏差为 10%；附加标“A”的特选型，其偏差为 5%。

2. 表面贴装型将“1N”改为“SMA”

3 齐纳阻抗是来自 60 秒的交流电压，结果当交流电流的均方根值等于 10%的直流稳压电流（IZT 或 IZK）%是 IZT 或 IZK 叠加。

4. 这里的最大齐纳电流值并非是绝对的，在实际稳态应用中，应保证电压和电流的乘积不超过额定功率值

Characteristic Curves

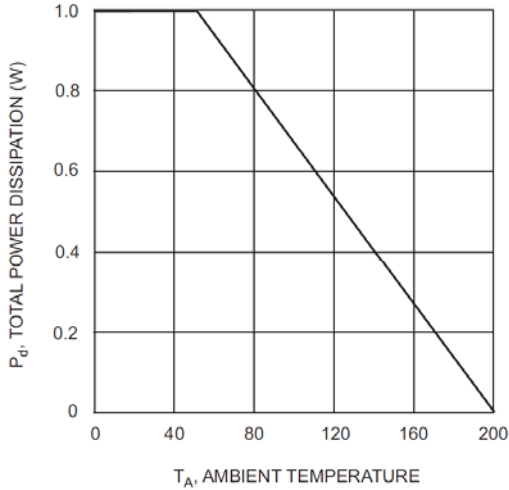


Fig.1 Power Dissipation vs Ambient Temperature

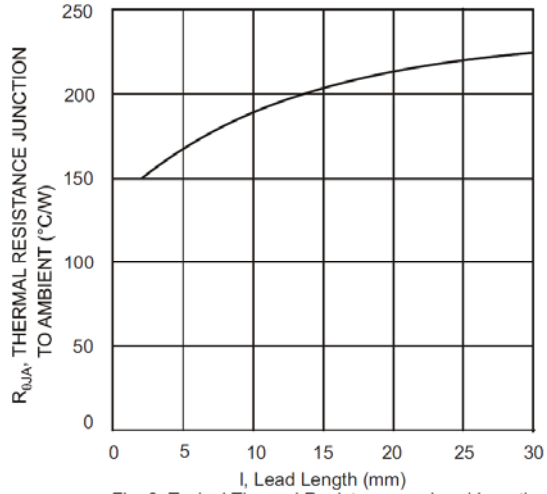


Fig. 2 Typical Thermal Resistance vs. Lead Length

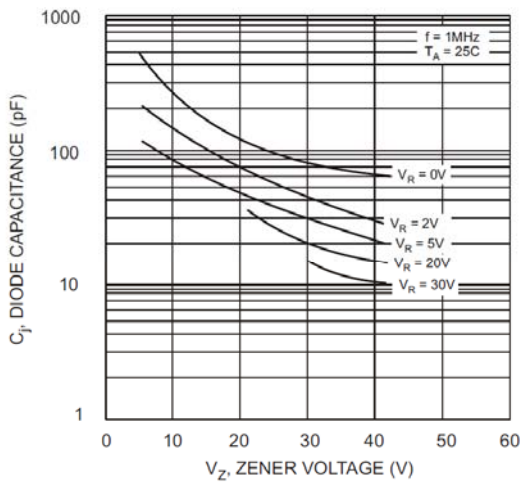


Fig.3, Junction Capacitance vs Zener Voltage

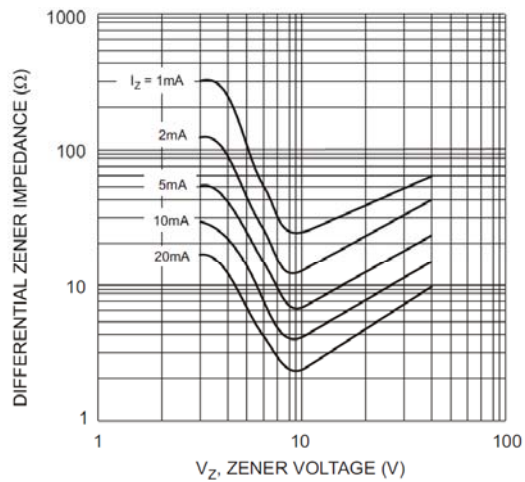


Fig. 4 Typical Zener Impedance vs. Zener Voltage